UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

Docket No. GIL4-BH60

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Total Pages in this Submission

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application Washington, D.C. 20231

Transr invent	mitte	d her	ewith for d:	filing under 3	5 U.S	5.C. 111(a) and 3	37 C.F.R. 1.53	s(b) is a new utility patent application fo	or an
DEI	IVE	RING	3 INTER	RACTIVE APP	LICA	TIONS			Ť
 and in	vente	ed by		W. delander in .					
RIC	CHAR	RD A	ERT MA NDREW HONY V		WEL	L	1 / / / / / / / / / / / / / / / / / / /		
			TION			-			
		INUA inuat						the requisite information:	
ار Which≸			1011	DIVISIUIIAI		Commutation	in-part (Cir)	of prior application No.:	
 	Conti	inuat	tion 🗀	Divisional		Continuation-	in-part (CIP)	of prior application No.:	
7		inuat	tion 🗆	l Divisional		Continuation-	in-part (CIP)	of prior application No.:	
II Enclo	sed:	are.							
Enclos	364 C	116.				Application	n Elements		
II 1.			on fee as	calculated an	d trar	nsmitted as desc	ribed helow		
VM9	\		9 .00 45	odiodidiod di	<i>1</i>	iorimou do doco	AIDOG DOION		
2.	X	Spe	ecification	n having		16	_ pages and ir	ncluding the following:	
	a.	X	Descrip	otive Title of the	e Inv	ention			
	b.		Cross F	References to	Relat	ted Applications	(if applicable)		
	c.		Statemo	Statement Regarding Federally-sponsored Research/Development (if applicable)					
	d.		Reference to Microfiche Appendix (if applicable)						
	e.	X	Background of the Invention						
	f.	X	Brief Summary of the Invention						
	g.	X	Brief Description of the Drawings (if drawings filed)						
	h.	X	Detailed Description						
	i.	X	Claim(s	as Classified	Belo)W			
	j.	X	Abstrac	et of the Disclos	sure				

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No. GIL4-BH60

Total Pages in this Submission

	Application Elements (Continued)											
	3.	X	Dra	wing(s) (when	neces	ssary as prescribed by	35 US	C 113)				
		a.		Formal		Number of Sheets			-			
		b.	X	Informal		Number of Sheets		8				
	4.	×	Oath or Declaration									
		a.	☑ Newly executed (original or copy) ☐ Unexecuted									
		b.	☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)									
		c.	☑ With Power of Attorney ☐ Without Power of Attorney									
na Peng J B		d.	DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. 1.63(d)(2) and 1.33(b).									
rifing that H. M. Touth that you hour I H. M. H.	5.		The Box	Incorporation By Reference (usable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.								
	6.		Computer Program in Microfiche (Appendix)									
hen hen hen hen hen han	7.		Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)									
## ## ##		a.	☐ Paper Copy									
M Mull		b.		Computer Re	adabl	e Copy (identical to co	mpute	r copy)				
		c.		Statement Ve	erifying	g Identical Paper and 0	Compu	ter Readable Co	ру			
						Accompanying	Applic	cation Parts				
	8.	X	Assignment Papers (cover sheet & document(s))									
	9.		37 CFR 3.73(B) Statement (when there is an assignee)									
1	0.		English Translation Document (if applicable)									
1	1.	X	Information Disclosure Statement/PTO-1449 Copies of IDS Citations									
1	2.		Preliminary Amendment									
1	Q	ΙSΑΙ										
ı	3.	X	Acknowledgment postcard									
1	4.	X	Certificate of Mailing									
				First Class	X	Express Mail (Specify	Label l	No.): EL1371642	212US			

UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No. GIL4-BH60

Total Pages in this Submission

			Ac	companying A	pplication Pa	rts (Continued)			
15.	15.								
16.	16. Additional Enclosures (please identify below):								
min din				Fee Calcula	ation and Tra	nsmittal			
1. If hands therefore the state of the state				CLAIMS	AS FILED				
	For		#Filed	#Allowed	#Extra	Rate		Fee	
Total (Claim	s	9	- 20 =	0	× \$18.00		\$0.00	
indep.	Indep. Claims 2 - 3 = 0 x \$78.00 \$0								
1000	le De	pendent Cl	aims (check if	applicable)				\$0.00	
H House							BASIC FEE	\$760.00	
OTHE	ER FE	E (specify	purpose)	As	ssignment Rec	ordation Fee		\$40.00	
	TOTAL FILING FEE \$800.0								
 A check in the amount of \$800.00 to cover the filing fee is enclosed. □ The Commissioner is hereby authorized to charge and credit Deposit Account No. as described below. A duplicate copy of this sheet is enclosed. □ Charge the amount of as filing fee. □ Credit any overpayment. □ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17. □ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b). 									
Dated:	A 11	gust 2, 1999					Signature	/	
cc:	Franklin D. Ubell, Esq. 2100 S.E. Main Street Suite 250 Irvine, California 92714								

10

15

20

25

35

DELIVERING INTERACTIVE APPLICATIONS

FIELD OF THE INVENTION

The present invention relates to a method and apparatus for delivering an interactive application to a plurality of target platforms.

DESCRIPTION OF THE PRIOR ART

Interactive application providers employ skilled programmers to develop new interactive applications. Examples of such interactive applications are predictive games for use in conjunction with a live sporting broadcast, quiz games for use in conjunction with a live quiz broadcast, on-demand quiz games (ie. not used in conjunction with a live quiz broadcast), home shopping applications and home banking applications.

US-A-5797010 and WO-A-98/37695 both disclose point-to-point systems for delivering applications such as a video-on-demand.

With the rapid development of new target platforms for interactive services (each employing a broadcast network with a different respective broadcast protocol) it is desirable to deliver the interactive applications over any chosen network in a simple and cost effective way. However conventionally this has been difficult because it has been necessary for the skilled programmers to take into account the different broadcast protocols during development of the new application.

Neither of the prior art documents mentioned above address the problem of delivering applications over different broadcast networks.

30 SUMMARY OF THE INVENTION

In accordance with a first aspect of the present invention there is provided a method of delivering an interactive application to a plurality of target platforms, the method comprising

providing a set of application components;

converting the set of application components into a plurality of streams of broadcast data, each stream of

10

15

20

25

30

35

broadcast data conforming with a respective target platform; and

delivering each stream of broadcast data to its respective target platform.

In accordance with a second aspect of the present invention there is provided apparatus for delivering an interactive application to a plurality of target platforms, the apparatus comprising

means for providing a set of application components;

a plurality of broadcast systems interfaces each converting the set of application components into a respective stream of broadcast data, each stream of broadcast data conforming with a respective target platform; and

means for delivering each stream of broadcast data to its respective target platform.

Instead of having to provide multiple sets of application components (each set complying with a different respective target platform) the invention allows the programmers to merely provide a single set of application components in any desired format, without needing to know anything about the ultimate target platforms. The broadcast system interfaces (BSIs) then convert the application components shortly before, or during the broadcast.

The invention provides a convenient method of delivering an interactive application to a number of target platforms each having different requirements. For instance the target platforms may comprise broadcast networks having different data protocols, formats or speeds. Alternatively the target platforms may comprise user interfaces with different memory capabilities etc.

The "open" architecture of the system enables new BSIs to be added when the interactive application is to be delivered to a new target platform.

In the case where the application comprises a realtime application (eg a predictive game for use in

10

15

20

30

35

conjunction with a live sporting broadcast) the method typically further comprises manually inputting real-time application data;

converting the real-time application data into a plurality of streams of real-time broadcast data, each stream of real-time broadcast data conforming with a respective target platform; and

delivering each stream of real-time broadcast data to its respective target platform.

The application components and/or real-time application data may be generated, converted and broadcast on-the-fly. However preferably the method further comprises storing the application components and/or real-time application data in a data store; and retrieving the application components and/or real-time application data from the data store before converting it into a stream of broadcast data.

A number of conversion steps may be necessary, including translating, substituting, selecting, time managing, or adapting for different data transmission mechanisms.

Provision may also be made for return path processing of return data (eg game-play input or home banking requests) from the target platforms.

25 BRIEF DESCRIPTION OF THE DRAWINGS

An embodiment of the present invention will now be described with reference to the accompanying drawings, in which:

Figure 1 is a schematic functional diagram of an interactive service network;

Figures 2-4 illustrate examples of screen displays presented to an operator during preparation for a live football game;

Figures 5 and 6 illustrate screen displays presented to a remote player of the live football game;

Figure 7 is a schematic diagram illustrating two return data paths; and

Figure 8 is a schematic diagram illustrating the function of a processing engine.

DETAILED DESCRIPTION OF AN EMBODIMENT

Referring to Figure 1, the network comprises a central system 1 and a number of target platforms 2. Each target platform comprises a respective broadcast network 3 and user interface 4. The central system 1 is controlled by a central computer system (CCS) 5 which comprises a Sun SPARC binary file designed to operate UltraSPARC architecture workstations or servers (not shown). Although the CCS is shown as a single unit it may be split into more than one binary file for performance and distributive requirements.

The CCS 5 communicates with a number of sub-systems 6 via a CCS text message gateway 7.

Authoring tools 8 include suitable tools (eg PCs) which are used by game programmers to develop new interactive applications. The interactive applications may all be very different but in general will include a number of application components such as executable program files, bitmaps, sound samples, real-time data instructions, video clips, and other multimedia and data resources. When the new applications have been developed and tested, the game programmer logs on to a Windows NTTM based submit tool 9 which saves the application components in an application database (not shown).

A number of previously saved applications are shown in Figure 1, namely six interactive, predictive games 10-15 for use in conjunction with a live sporting broadcast and a set of on-demand game engines 16.

A set of Universal Live Tools 17 (which include PCs running Windows NT^{TM} based applications, and suitable input devices) are used by skilled operators to support the live applications 10-15.

A Mission Control system 18 (a Windows NT^{TM} based application) is used by a system control officer to initiate application transmissions and manage real-time broadcasts.

30

35

5

10

15

20

25

10

15

20

25

30

35

An example of one of the interactive, predictive games (football 10) will be described below. The game is described in more detail in EP-A-0873772. In the interactive football game, remote players are able to attempt to predict certain events prior to commencement of a live football match and can also attempt to predict certain events during the live broadcast.

Initially, prior to commencement of the live broadcast, the football application 10 is initiated by the system control officer using Mission Control 18, and an operator uses the Live Tools 17 to set up certain predetermined information relating to the live broadcast for transmission to the user interfaces 4.

The operator is first presented with a screen as shown in Figure 2 in which he can select a home team and an away team from a list of such teams which have been previously stored in the application database. The operator can select the appropriate home and away teams and then click This information is then stored in a Live the OK button. File store (not shown) associated with the Live Tools 17. The application database stores information relating to each team squad which will typically include more players than those actually selected to play the match. before commencement of the match, the actual team will be announced and this information will be conveyed to the The operator then causes the Live tools 17 to operator. display all members of the squad of each team (Figure 3) allowing the operator to indicate which members of the squad have been picked to play and at the same time, he can define the type of player, for example goalkeeper, attacker, midfield or defender. Once that information has been indicated, it is then stored in the Live File store.

The operator also sets up the particular types of event which can be predicted during the live broadcast. In this example, these events include the time of the first goal, the time of the first booking etc. Examples of such

15

30

35

events are indicated by the line of buttons at 50 in Figure 4.

Once all the information for the live broadcast has been set up by the operator, a screen such as that shown in Figure 4 is displayed which at this time is inactive since the interactive game has not commenced. It will be noted, however, that the operator has been able to set up a significant amount of information in advance of the live broadcast itself.

At the appropriate time, but before commencement of the football game, the operator will click the button 51 and the application will then be transmitted to the CCS 5 and broadcast to all the user interfaces 4 over the broadcast network 3 as discussed below. The following application components are broadcast:

- 1. Real-time data instructions such as "display copyright message at start of football game"; or "display [bit map] at half-time".
- 2. Executable computer code to be run by the user 20 interfaces to implement the game.
 - 3. Bit maps eg. player faces, team logos etc.
 - 4. Sounds eg sampled referee's whistle or crowd noises.
- 5. Video clips, eg of individual players scoring a 25 goal.
 - 6. Team data eg team names, player names and player positions.

The central system 1 is designed to be able to deliver applications on any target platform. Five target platforms are illustrated in Figure 1, each employing a different broadcast network, ie. NCI DTV Navigator 20, OpenTV digital TV 21, MHEG-5 22, WebTV/WinCE 23 and PowerTV 24. The system can also be expanded to handle any number of additional broadcast networks 25. Each broadcast network 20-25 has a respective different broadcast protocol. In order to deal with this problem, each target platform has an associated Broadcast System Interface (BSI) 26 which

10

15

20

25

30

35

converts the set of application components associated with each application into a plurality of streams of broadcast data, each stream of broadcast data conforming with the broadcast protocol of its respective target platform. Thus when the operator clicks on button 51, the set application components (ie. executable program files, bitmaps, sound samples, real-time data instructions, video clips etc.) are passed to the CCS 5 and then fed as parallel data streams to the BSIs 26 which convert the application components as appropriate prior to delivery over a respective broadcast network 3. The BSIs 26 are previously encoded to make any necessary conversions in order to conform the data to their associated target platform. The conversion may (amongst others) include the following techniques:

Translation

This is the most basic data manipulation. Here the data is converted from an internal representation required by the authoring tools 8 into a representation appropriate to a respective broadcast protocol.

For example, a target platform may only receive ASCII text. In this case the BSI converts all data being transmitted from a binary representation to ASCII.

Translation takes place on a byte-to-byte basis and is the lowest level of transformation employed by the BSIs 26.

Substitution

In some cases the BSIs will replace application components with an alternative. This is similar to translation, except that substitution is normally done at a component level.

An example of this might take place where a game is being broadcast to two networks where the capabilities of the user interfaces 4 are different. The game being played contains a real-time video component that is delivered to the user interface 4 for display. On one network, the user interface is not capable of storing the video component due to lack of memory and the BSI substitutes the video

10

15

20

25

30

35

component with a set of still frames extracted from the video component. On another network the user interface is capable of storing the video component and the BSI delivers the video component unchanged.

In another example a 16-colour bit map is to be delivered and one of the broadcast networks 3 or user interfaces 4 may only be able to support an 8-colour bit map. In this case the BSI converts the bit map into 8-colour format on the fly prior to delivery.

Selection

In the case of selection, the BSI selects which application components to send or not to send. An example would be an application that contains three different binary files, one for a browser target platform, one for a target platform with an OpenTV broadcast network, and another for a target platform with a PowerTV broadcast network. The BSI associated with the OpenTV network would transmit the binary file for the OpenTV network, and ignore the others. The BSIs supporting the other target platforms behave in a similar way.

Timing

Different broadcast networks delivering the same programme are not necessarily temporally synchronised. Differences in timing may be up to one or two seconds, indeed set top boxes on different networks would generally have slight variances in their clocks, ie a box on one network may think that the time is 12:34.00 whilst a box on another network may believe it is 12:34.03. In addition to different networks having different clocks it is also a fact that different networks may not be broadcasting content at exactly the same time, ie a video program may start up to 1 or 2 seconds later on another network even though the clocks are the same.

In order to manage these anomalies between networks it is necessary for the BSI handling that network to compensate by introducing the required delay, either by

15

20

25

30

35

delaying the broadcast of messages, or more appropriately by altering the timing information within messages.

Some networks do not provide a synchronised clock on all set top boxes. In these cases it is necessary for the BSI handling those networks to provide a clock message which the user interface may use to update its own synchronised clock.

Data Transmission Mechanisms

Different broadcast networks will probably use different techniques for transmission. Some may present a single large bandwidth download path for all data, some may provide a high bandwidth mechanism for application components, and a smaller bandwidth mechanism for real-time data. In all of these cases the BSI will manage the different transmission techniques.

Exploring the above example in more detail, it is likely that a browser based architecture would provide a mechanism for providing application components from the service provider's server, using a carousel for example. In this scenario browser BSI would forward all game components to the server to be placed on the carousel. The binary data messages would most likely be fed to the server which would then use IP tunnelling or similar to transmit the data to the user interfaces.

In the case of the MPEG-II system the BSI would produce MPEG-II transmit packets containing MPEG-II private data sections containing the binary data messages and the component downloads in a defined format.

The user interfaces 4 each include an engine 27 which decodes incoming data and presents it to an application processor 28 which runs executable program code and also incorporates suitable memory for storing data. Items 27,28 are typically provided in a set-top-box (STB) which is connected to a conventional home TV set (not shown). Alternatively items 27,28 may be part of a personal computer. Although only a single user interface 27,28 is shown in Figure 1 with each broadcast network 20-25, it

10

15

20

25

30

35

will be appreciated that each network 20-25 will broadcast to a large number of user interfaces.

In a commercial broadcast such as cable, satellite or the internet, the application processors 28 (in the form of set top boxes or personal computers) may have different capabilities. It is possible that the processors 28 may have different graphical abilities (such as colour depth, background mpeg and bitmap formats), different amounts of RAM and differing audio capabilities.

It is not desirable to target the lowest capability processor only, as customers who have payed more for a more powerful decoder should reap the benefits.

Therefore in order to provide the highest quality of interactivity on any given processor it is necessary to create applications which can selectively use different display models, colour depths, sounds and bitmaps. In addition different sections of code may be used for different processors. The engines 27 are able to interrogate the capabilities of the application processors 28 at runtime and dynamically decide which components of the broadcast applications to utilise.

The function of the engines 27 is illustrated in more detail in the example of Figure 8. In this case a broadcast system interface 70 is encoded to convert the application components into the format required by an Open TV digital TV broadcast network 71. A second BSI 72 converts the application components into the required by a PowerTV broadcast network 73. Two types of user interface 74,75 are connected to the open TV network 71. User interface 74 includes an application processor 76 which can support 16-colour bitmaps. In contrast, user interface 75 includes an application processor 77 which can only support 4-colour bitmaps. The BSI 70 delivers 4colour and 16-colour bitmaps over the network 71. user interface 74,75 has a respective engine 78,79. engine 78 interrogates the application processor 76 and determines that the processor can support 16-colour

10

15

20

25

30

35

bitmaps, and so downloads the 16-colour bitmaps on to the processor 76. In contrast, the engine 79 downloads the 4-colour bitmaps and discards the 16-colour bitmaps.

Bitmaps are a relatively simple example, code modules are more complex. For instance one type of user interface may use a store and forward return path mechanism, whilst another (on the same network) may use an instant access high bandwidth modem. Depending on which, the engine 27 would have to load and link the corresponding code module.

The engines 27,78,79 are generic items of code (i.e. the same engine is provided with each user interface). This enables the system to be easily expanded to deal with a new application processor 28 with different capabilities.

The engines 27,78,79 may either by previously provided in a user's personal computer or set-top-box, or may be broadcast over the broadcast network 3 before broadcast of the application components.

Returning to Figure 8, only a single type of user interface 81 is supported on network 73. In this case, the BS1 72 broadcasts 16-colour bitmaps only, and the engine 83 downloads the 16-colour bitmaps to the processor 82. Therefore in this case the engine 83 is effectively "transparent" as far as the 16-colour bitmaps are concerned.

When the application has been downloaded to the user interfaces 4, the interfaces display a screen similar to that shown in Figure 5. This indicates to the player the type of prediction which he can attempt. A comparison of Figures 4 and 5 will show that six of the events selected by the operator for prediction set out in the line 50 are displayed on the display of Figure 5.

The remote player can then select one or more of the predictions. For example, if he selects the "Time Slot of First Goal", the screen shown in Figure 6 will be displayed which defines six different 15 minute periods during the playing of a football game. The player can then indicate one of those periods, for example, the period 16-30

10

15

20

25

30

35

minutes, and this prediction is then stored in memory. In a similar way, the player can predict any one or more of the other items set out in Figure 5.

As the game develops, various events may or will occur. For example, when the first goal is scored, the operator clicks on an appropriate button and the information is then transmitted to the user interfaces 4.

During and/or after a game, the user interfaces 4 compare the associated player's predictions with the actual events. If the local player was successful in his prediction then the user interface 4 will indicate this to the player and will also pass that information via a suitable return path (eg the public switched telephone network) to the CCS 5 where it is handled by suitable return path processing 29.

An example of the return path processing 29 illustrated in Figure 7. STB 30 is connected to a cable modem 31 which compresses the return data prior to transmitting it over a cable network to a cable service provider server 32. The return path processing 29 includes a decompressor 33 which decompresses the data into a form suitable for the CCS 5. STB 34 is connected to a modem 35 which transmits the return path data to a modem 36 in the return path handling system 29 over the conventional public switched telephone network (PSTN). Once the return data has been converted by the return path processing system 29, it is processed by the CCS 5 which provides standard scoring and voting facilities. For instance the users playing the football game may each have an individual score which is stored in a user database 30 and updated by the makes a correct prediction. when the user Alternatively the return path data may be used by the CCS 5 to register votes from the user interfaces. path processing facilities provided by the CCS may be augmented by a plug-in processing application 37. instance a programmer can develop a new game which requires overall results or league positions to be broadcast back to the user interfaces and a suitable plug-in processing application 37 can be installed by the programmer. In some applications, however, return path communication with the CCS 5 is not necessary.

We claim:-

5

10

15

 A method of delivering an interactive application to a plurality of target platforms, the method comprising providing a set of application components;

converting the set of application components into a plurality of streams of broadcast data, each stream of broadcast data conforming with a respective target platform; and

delivering each stream of broadcast data to its respective target platform.

2. A method according to claim 1 further comprising manually inputting real-time application data;

converting the real-time application data into a plurality of streams of real-time broadcast data, each stream of real-time broadcast data conforming with a respective target platform; and

delivering each stream of real-time broadcast data to its respective target platform.

- 3. A method according to claim 1, further comprising storing the application components and/or real-time application data in a data store; and retrieving the application components and/or real-time application data from the data store before converting it into a stream of broadcast data.
- 4. A method according to claim 1, wherein the step of converting comprises translating, substituting, selecting, time managing, or adapting for different data transmission mechanisms.
- 5. A method according to claim1 1, further comprising receiving and processing return data from one or more of the target platforms.
 - 6. A method according to claim 5 wherein the application comprises a game and the return data comprises game-play input.
- 7. A method according to claim 1, wherein each target platform comprises a broadcast network and an application processor, and wherein the delivering step comprises

15

broadcasting the stream of broadcast data to the application processor via the broadcast network.

- 8. A method according to claim 7 further comprising interrogating the application processor to determine the data capabilities of the application processor; and downloading data from the stream of broadcast data in accordance with the determined data capabilities of the application processor.
- 9. Apparatus for delivering an interactive application to a plurality of target platforms, the apparatus comprising
- a system for providing a set of application components;
- a plurality of broadcast systems interfaces each converting the set of application components into a respective stream of broadcast data, conforming with a respective target platform; and
- a system for delivering each stream of broadcast data to its respective target platform.

ABSTRACT OF THE DISCLOSURE

A method of delivering an interactive application to a plurality of target platforms (2). The method comprises providing a set of application components;

converting the set of application components into a plurality of streams of broadcast data, each stream of broadcast data conforming with a respective target platform (2); and

delivering each stream of broadcast data to its 10 respective target platform (2).

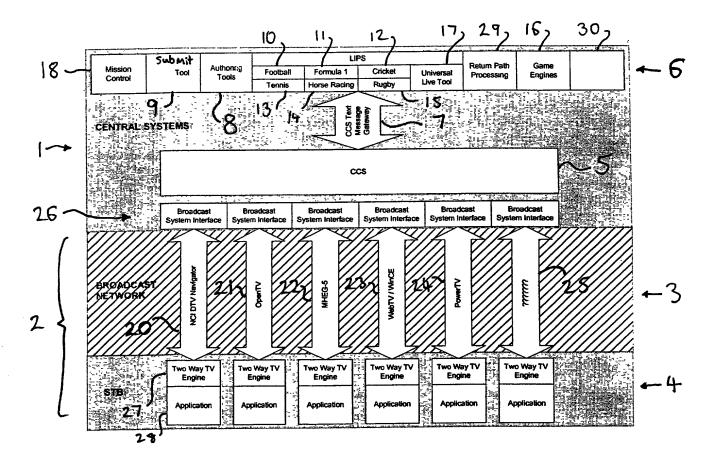
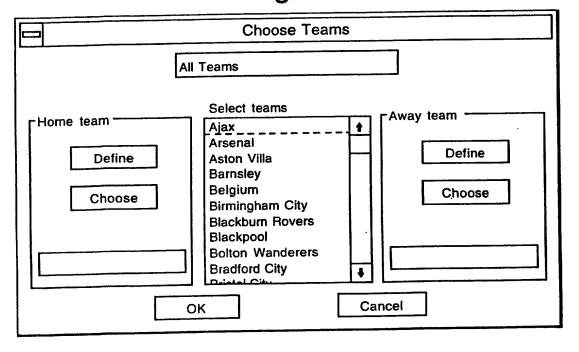
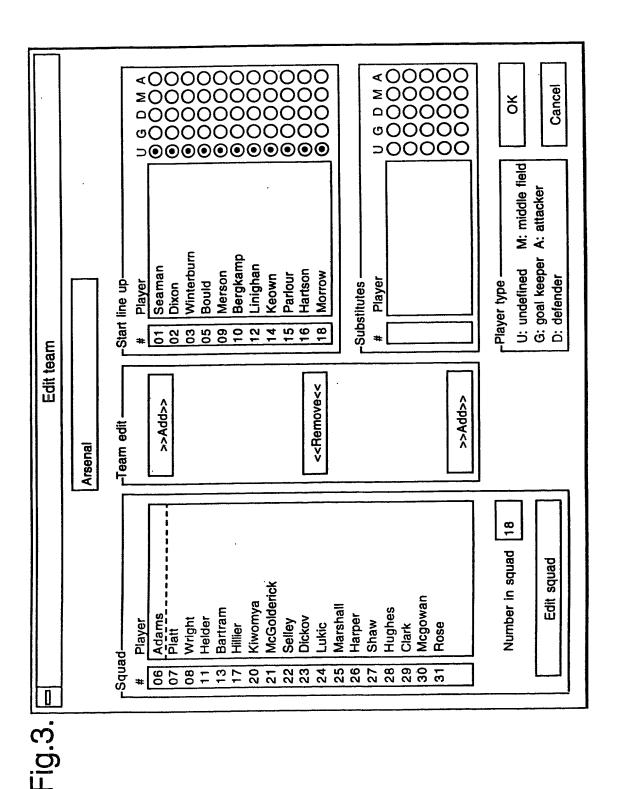
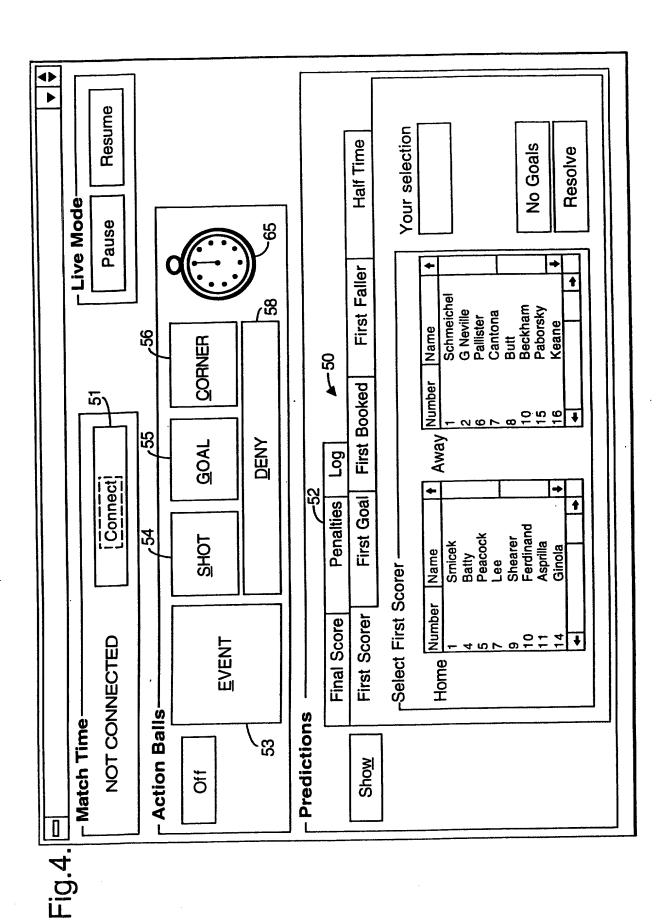


Fig. 1

Fig.2.







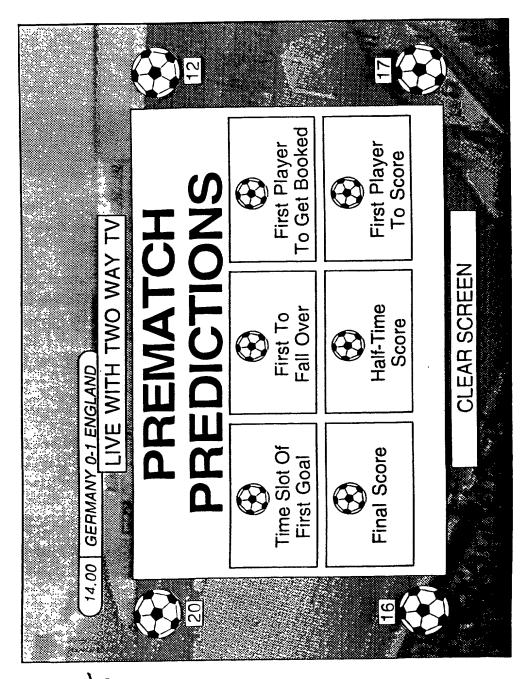


Fig. 5

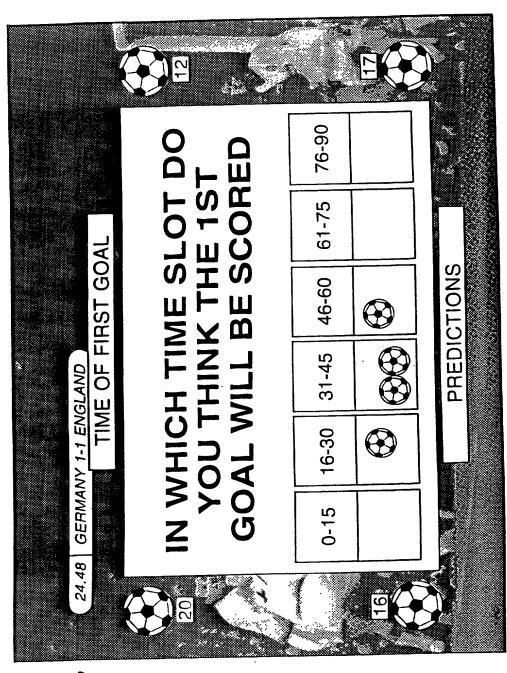


Fig.6



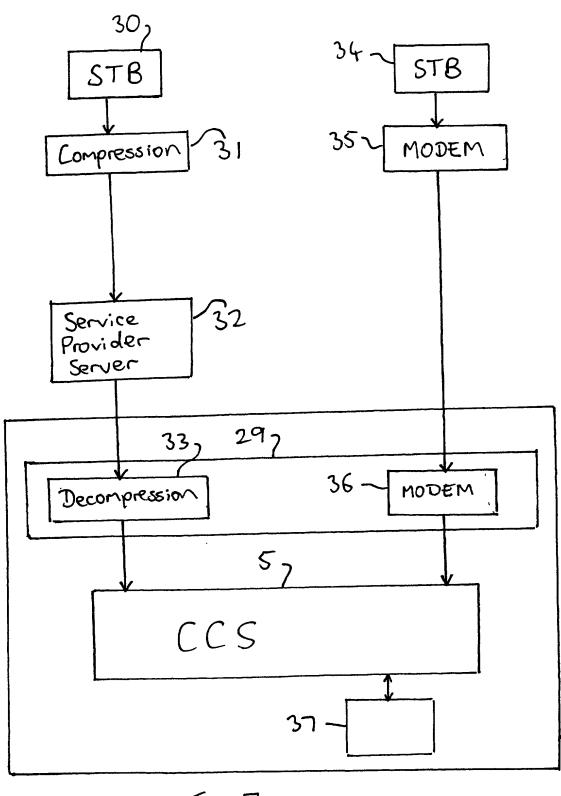


Fig. 7

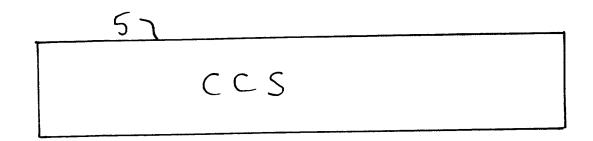

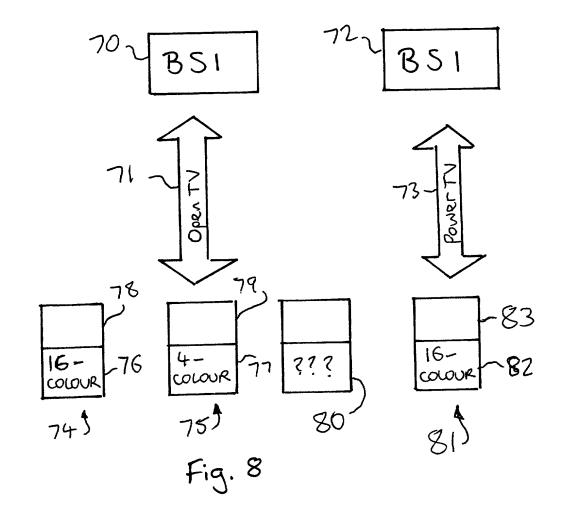

DECLARATION AND POWER OF ATTORNEY

As a below-named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of subject matter which is claimed and for which a patent is sought on an invention entitled DELIVERING INTERACTIVE APPLICATIONS

the specification of which	is atta	iched hereto or			
was filed on		ited States Applicati		PCT Int	ternationa
Application Number		and was amended	on	(if a	applicable
I hereby state that I has specification, including the acknowledge the duty to CFR 1.56. I hereby claim foreign application (s) for application which designate below and have also identified inventor's certificate, or application on which priority.	he claims, as disclose inform foreign prior patent or invited at least or iffied below, by PCT internations.	s amended by any a mation which is mater ity benefits under 35 ventor's certificate, o ne country other than by checking the box, ar onal application havir	amendment refi ial to patentabil U.S.C. 119(a)-(r 365(a) of an the United State by foreign applic	erred to ity as defi d) or 365 y PCT int es of Amel ation for a	above. ined in 37 (b) of any ternationa rica, listed patent of
Prior Foreign Application Number(s)	Country	Foreign Filing Date	Priority Not Claimed	Certified Attached YES	
98307353.7	EP	11 SEPT 1998			

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: Joseph W. Price 25,124; Franklin D. Ubell 27,009; Albin H. Gess 25,726; Doyle B. Johnson 39,240; Michael J. Moffatt 39,304; Bradley D. Blanche 38,387

Direct all correspondence to: Price, Gess & Ubell 2100 S.E. Main Street, Suite 250 Irvine, California 92614 USA I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C 1001 and that such willful false statements may jeopardise the validity of the application or any patent issued thereon.

Full name of sole or First Inventor	Jason Robert MALAURE					
Inventor's signature	Media	Jus				
Residence address	Middlesex, United Kingde	om				
Post Office address	33 Shaftesbury Way, Str TW2 5RN, United Kingdo	om	\			
Country of Citizenship	United Kingdom	Date of signature <u></u>	and Duly 1991			
Full name of Second Inventor	Richard Andrew KYDD					
Inventor's signature						
Residence address	Middlesex, United Kingde	om				
Post Office address	64 Popes Avenue, Strav TW2 5TT, United Kingdo	om .	,			
Country of Citizenship	United Kingdom	Date of signature	5/7/91			
Full name of Third Inventor	Simon Anthony Vivian C					
Inventor's signature	Mars amon					
Residence address	London, United Kingdom					
Post Office address	11 Eton Road, London N	W3 4SS, United K	ingdom			
Country of Citizenship	United Kingdom	Date of signature	5/7/99			